


Rotary Premade Pouch Machine 8SG-200A

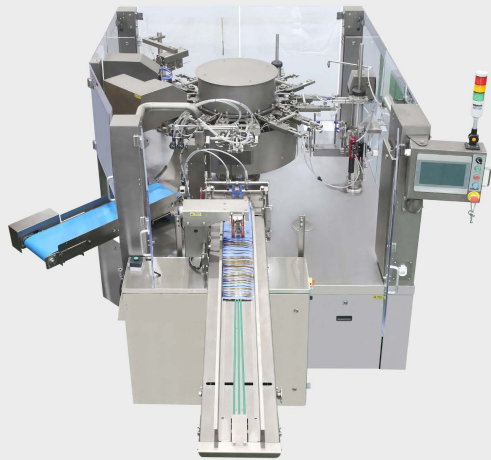

Maximize your ROI with a simple but powerful packaging solution.

Simplex rotary automatic pouch packing machines feature a single lane for consistent throughput. Great for a variety of products including liquids, solids, and powders, the rotary premade pouch machine will enable your business to scale up quickly.

features



- Allen Bradley servo-drive control platform
- PLC with color touch screen
- Durable welded steel frame
- Production parameter memory including gripper size, machine speed, sealing temperature, and filling volume
- Pouch presence detection: No pouch = No filling or sealing
- Bag deflation
- Automatic deoxidizer feeding station
- Two-step sealing process

options



- Robotic pick & place infeed system
- Integration with multi-head scales; volumetric, auger, or liquid fillers
- Fully interlocked safety guards
- Presealing station for liquids
- Zipper opening device
- Extended bag magazine
- Date coding
- Integration with checkweighers and metal detectors
- Dust suction nozzles and dust collector hood
- Product settler
- Ethernet connectivity
- Washdown design (IP65 or IP66)
- Gash flush
- Bag rejection station
- Modified discharge configurations

**THE PREMIER PREMADE PACKAGING MACHINE
FOR OPEN MOUTH QUAD SEAL BAGS.**

Rotary Premade Pouch Machine **SIMPLEX MODELS**

Technical Specifications

| Simplex Model | 4SC-235 | 6S-320 | 8SG-200A | 8S-235 | 8S-285 | 8S-320 | 8S-450 | 10S-235 |
|--------------------------------------|------------------------------|---|---|---|---|---|---|---|
| Number of Stations | 4 | 6 | 8 | 8 | 8 | 8 | 8 | 10 |
| Number of Lanes | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Maximum Speed Per Minute (dry cycle) | 25 | 50 | 35 | 60 | 60 | 50 | 40 | 50 |
| Bag Gripping Range (mm) | 90-235mm | 160-320mm | 100-200mm | 90-235mm | 130-285mm | 160-320mm | 280-450mm | 90-235mm |
| Maximum Bag Length (mm) | 300mm | 420mm (500mm with extender) | 425mm (500mm with extender) | 350mm (500mm with extender) | 420mm (500mm with extender) | 420mm (500mm with extender) | 500mm | 350mm |
| Power Supply | 480 V / 3 Ph / 60 Hz / 30 A) | 480 V / 3 Ph / 50/60 Hz / 35 A | 480 V / 3 Ph / 60 Hz / 35 A | 480 V / 3 Ph / 60 Hz / 35 A | 480 V / 3 Ph / 50/60 Hz / 30 A | 6480 V / 3 Ph / 50/ 60 Hz / 35 A | 480 V / 3 Ph / 60 Hz / 35 A | 480 V / 3 Ph / 60 Hz / 35 A |
| Compressed Air | 20 cfm | Approx. 600NL/min, 5-6kgf/cm ² | Approx. 700NL/min, 5-6kgf/cm ² | Approx. 600NL/min, 5-6kgf/cm ² | Approx. 600NL/min, 5-6kgf/cm ² | Approx. 600NL/min, 5-6kgf/cm ² | Approx. 600NL/min, 5-6kgf/cm ² | Approx. 600NL/min, 5-6kgf/cm ² |

Bag Styles



ASK ABOUT OUR IN-STOCK EQUIPMENT PROGRAM!

Viking Masek

40 Woodland Court | Oostburg, WI | USA

Phone 920.564.5051 | **Website** vikingmasek.com