


# Viking Masek Flow Wrapper FW-300



The FW-300 (top & bottom film reel holder) is the complete solution for a large variety of products with various production run speeds. Including semi-automatic or automatic feeding and multiple format changes.

Featuring a robust machine build, cantilever design, modular construction, high flexibility & performance. Providing ease of operation & changeover, low maintenance cost and servodriven control.

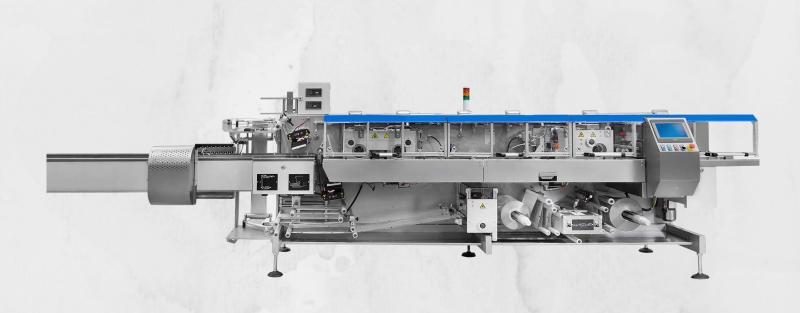

bag size

### 500 bpm

max. 250 × 550 mm (9.84" × 21.65")

min. 25 x 50 mm (0.98" × 1.96")



7

configurations

## Flow Wrapper 300 In Detail

Featuring a robust machine build, cantilever design, modular construction, high flexibility & performance. Providing ease of operation & changeover, low maintenance cost and servo-driven control.

This common platform has been used to develop multiple configurations that combined with a wide range of available accessories allow the FW-300 to be utilized with many different products as well as to the most demanding requirements in a wide range of production environments.

Our extensive experience also enables us to offer a wide number of accessories and feeding systems for the greatest variety of different products.





- Pusher conveyor
- Top and bottom reel holder
- Universal forming box
- Fin longitudinal sealing unit
- End cutting and welding unit
- Longitudinal welding module
- Outfeed conveyor
- Transmission cabinet
- 10.4" Touch Screen (HMI)
- Easy changeover
- Modular construction
- Minimal maintenance requirements
- Automatic film splice
- Robust stainless steel build



- Poly configuration for polyethylene films
- Cold configuration for cold sealing films
- Box Motion configuration for hermetic sealing
- Robotic handling for right hand execution Integration with feeders
- Integration with ancillary equipment

#### Max. speed

500 bpm

#### Weight

1000 - 1500 kg (2205 - 3307 lb)

### **Bag width** 25 - 250 mm

(0.98" - 9.84")

**Bag length** 50 - 550mm (1,96" - 21,65") Air pressure 6 bar (15-18 CFM at 90 PSI)


### **Power supply**

380-440 VAC / 3 Ph / 50-60 HZ







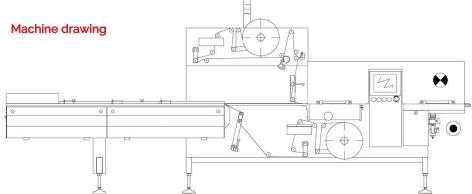



#### **US Headquarters**

Viking Masek Packaging Technologies, Inc. | 40 Woodland Court | Oostburg, WI 53070 | USA Phone + 1 920 564 5051 | Email sales@vikingmasek.com | Website www.vikingmasek.com